






## RETI STIRATE PEDONABILI

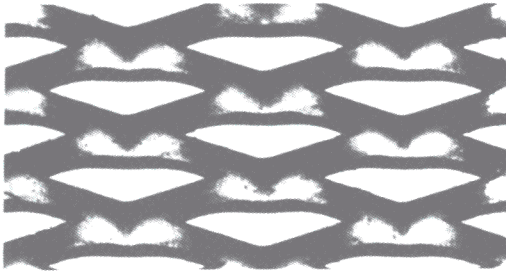


FILS 15 - 16

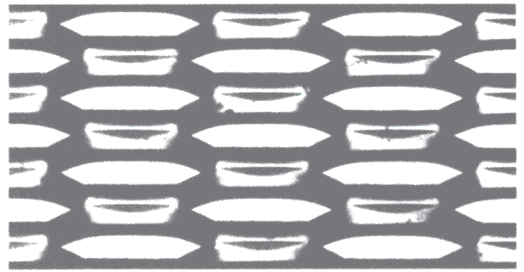



FILS 20 - 21 - 22

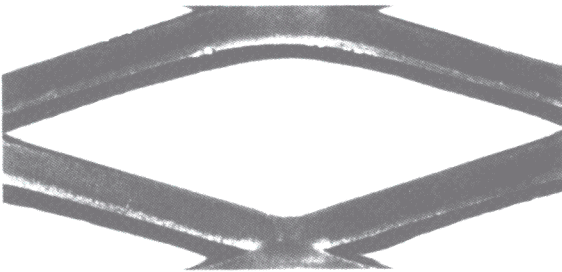


FILS 9

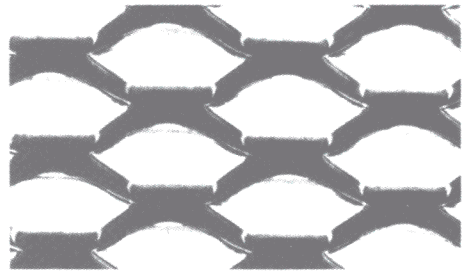

FILS E3 - E4

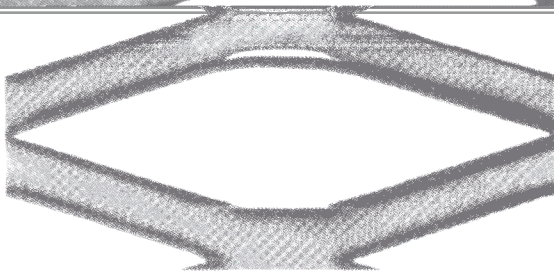

SP 2 - SP 5



SP 2 - A

SP 5 - A

Dimensione convenzionale			Peso per m <sup>2</sup>		Dimensioni max. dei rotoli o fogli mm.	
n.	a -/10 mm	S - /10 mm	~ Kg.	Larghezza nel senso DL	Lunghezza nel senso DC	
	40	30	17	2000		
	40	40	23	1500		
	30	30	13,8	1000	2500	
	40	30	20	1000	2000	
	40	40	24	1500		
				1000	2600	
	120	40	17	1250		
				1500		
	40	30	11	1000	3000	
				1250		
	40	40	14	1500		
	95	40	15		3000	
	95	50	18,5	1500		
	95	40	14			
	95	50	17	1500	3600	

Indicazione commerciale	Design DL mm
FILS - 15	43
FILS - 16	43
FILS - 20	44
FILS - 21	44
FILS - 22	44
FILS - 9	125
E 3	44
E 4	44
SP 2-A	110
SP 5-A	110
SP 2	110
SP 5	110